

Figure 1. Wiring in Control4 Panel



8-Channel 0-10V Dimmer Wiring Guide

Supported Model

- C4-DIN-0-10V-DIM-E 8-Channel Dimmer

Diagrams Color Code*:

Black	Line
Red	Switched Hot
Grey	Neutral
Green	Earth Ground
Blue	Ethernet
Violet	0-10V (+)
Grey Dashed	0-10V (-)
Orange	DC (+)
Orange Dashed	DC (control)


Wiring Diagrams

Use the Control4® 8-Channel 0-10V Dimmer wiring diagrams along with the *8-Channel 0-10V Dimmer Installation Guide* to install 8-Channel 0-10V Dimmers.

Note: Many 0-10V lights require separate on/off control. Determine whether on/off control is required before completing wiring. If required, on/off control can be provided one of two ways:


1. Wire on/off leads from the light to a channel on a Control4 Relay Module
2. Wire on/off leads from the light to an external relay and then wire the external relay to the 0-10V Module external relay terminals that correspond to the 0-10V channel controlling the light.

Examples of each type of on/off control as well as a 0-10V light that does not require on/off control are provided to the right.

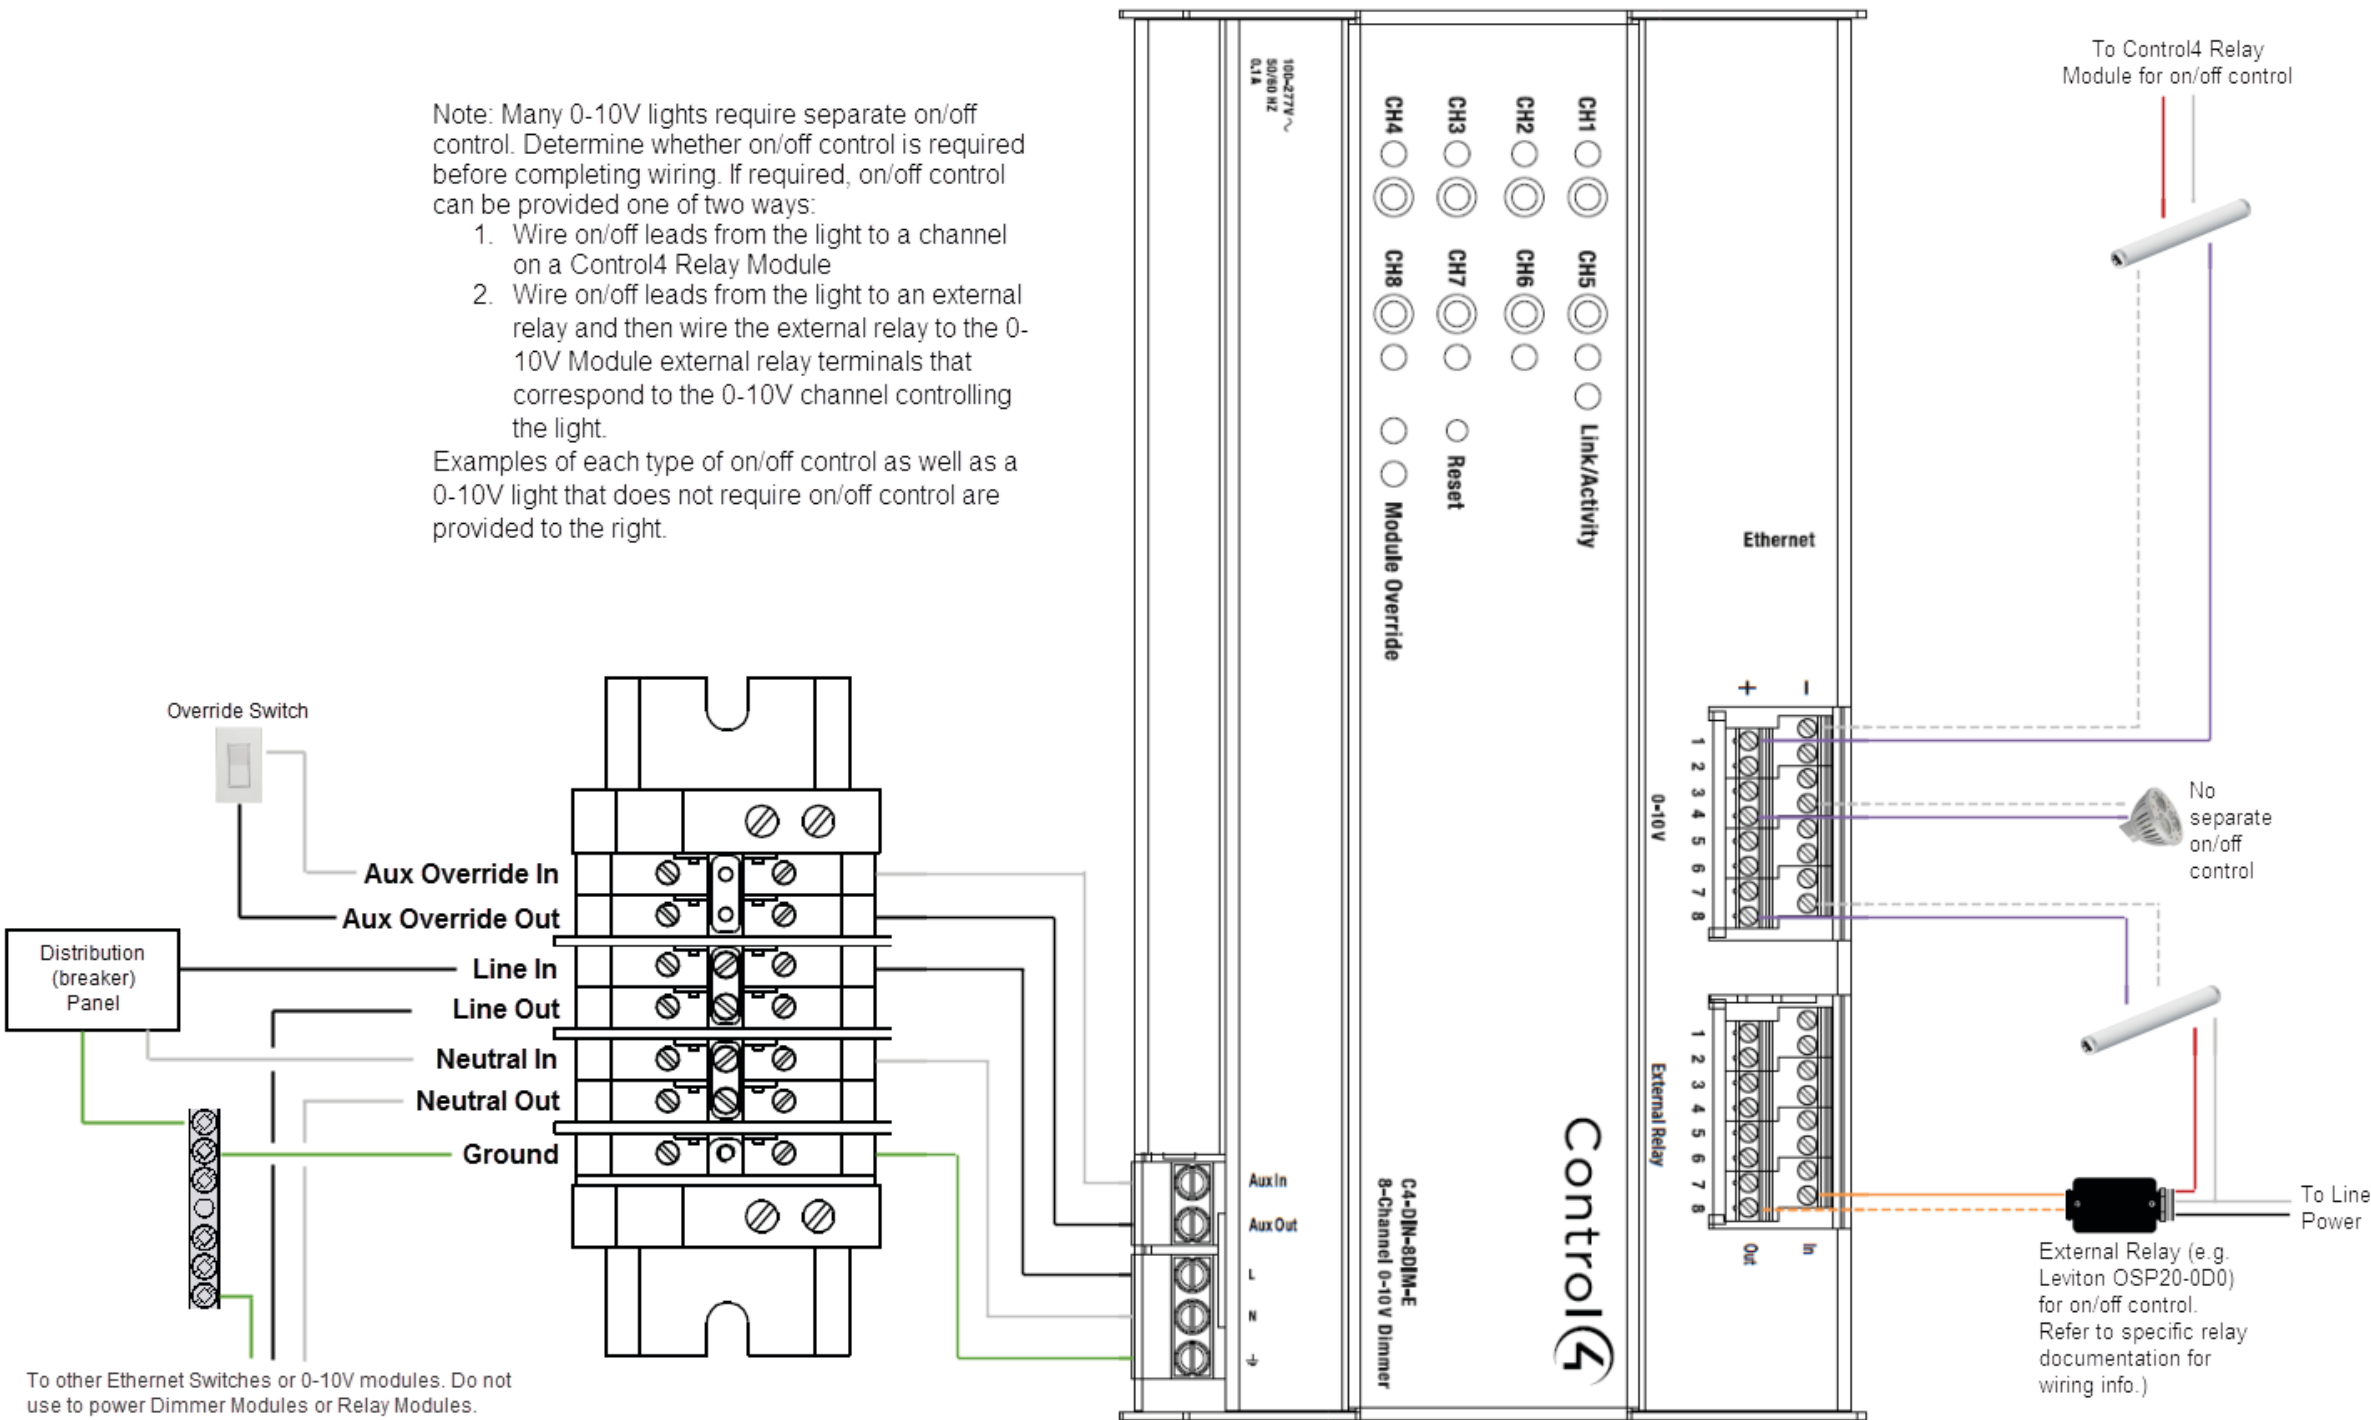

* **IMPORTANT!** The wire colors shown in Figures 1 and 2 and in the 'Diagrams Color Code' table are examples only. Actual wire colors differ by country and/or voltage.

Figure 2. Wiring in Standard DIN Rail Panel

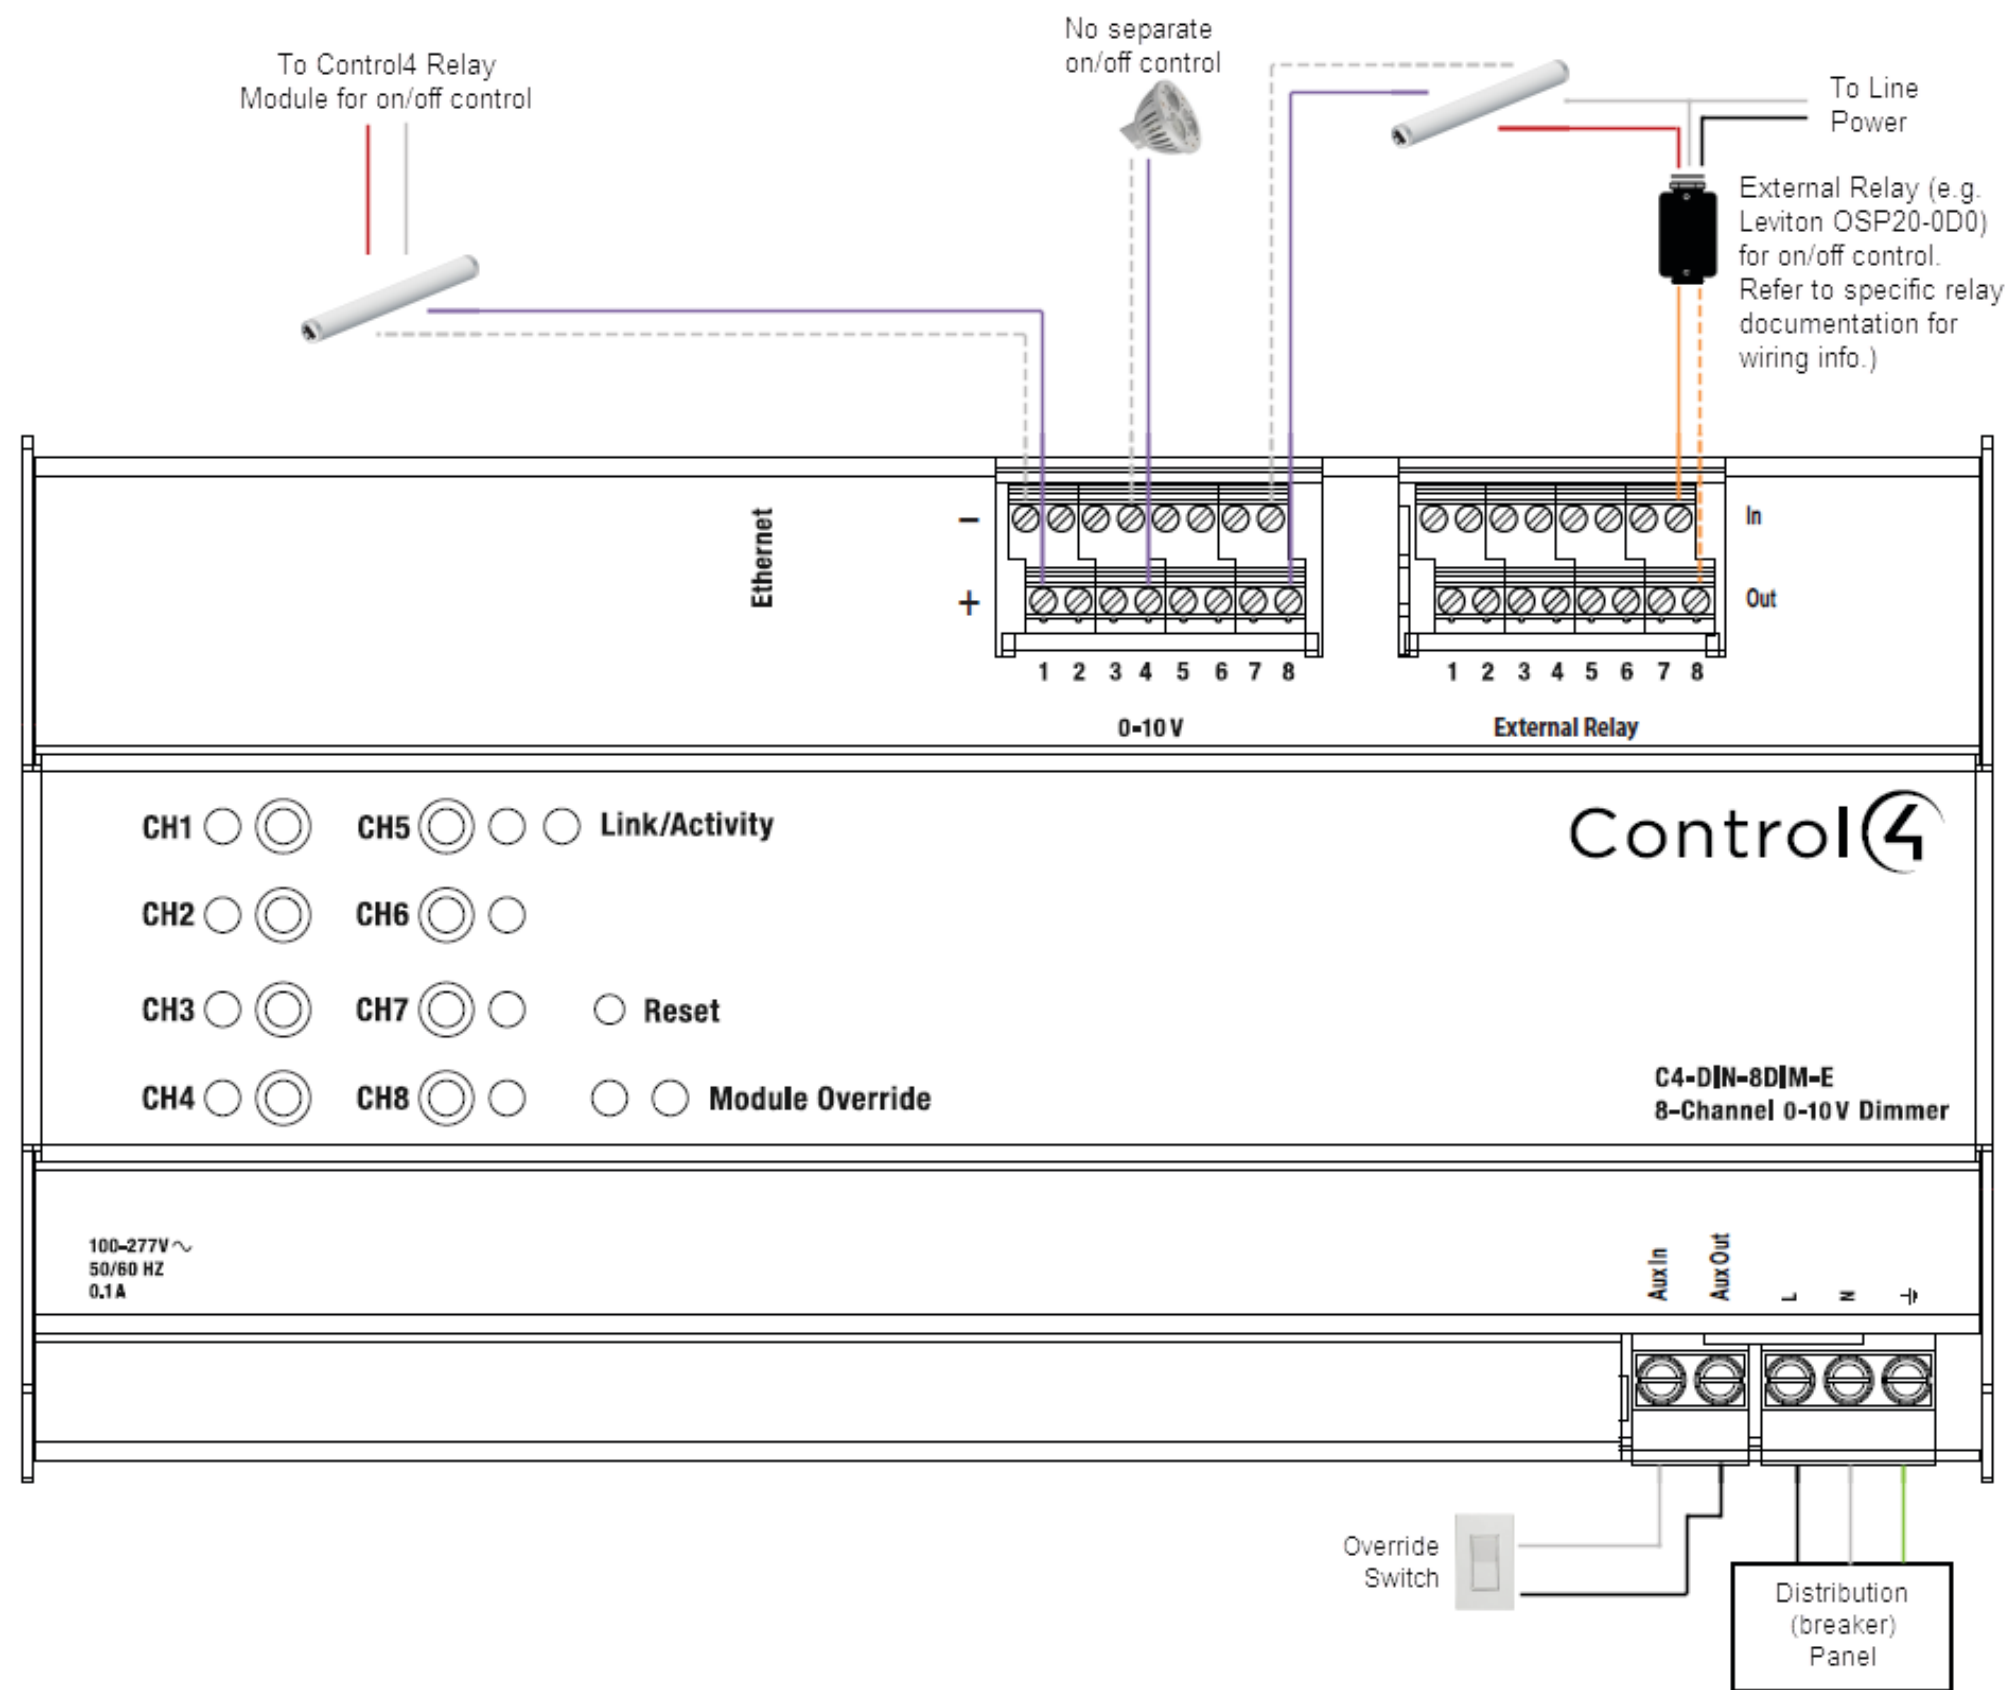

About this Document

Part Number: 200-00302 Rev. A 3/11/2013