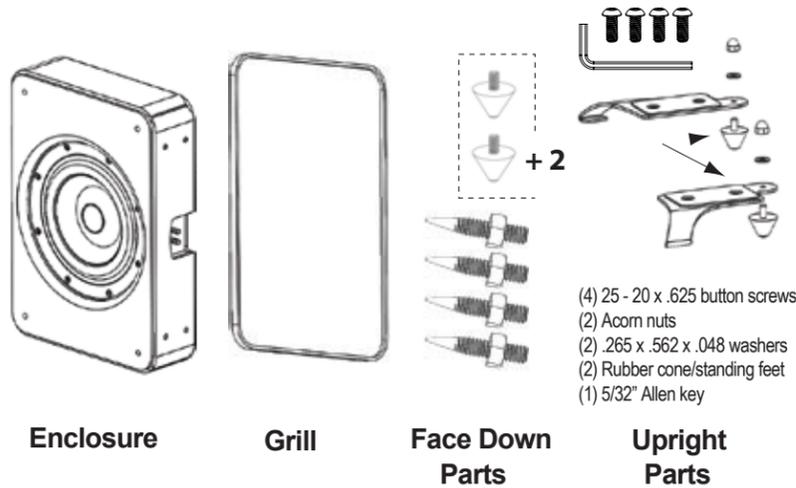
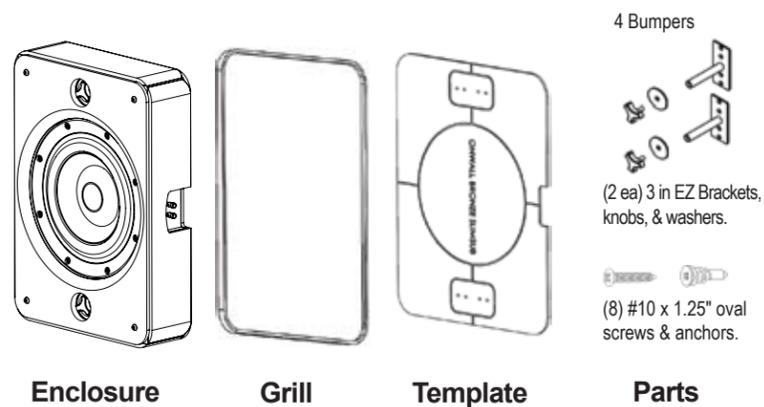
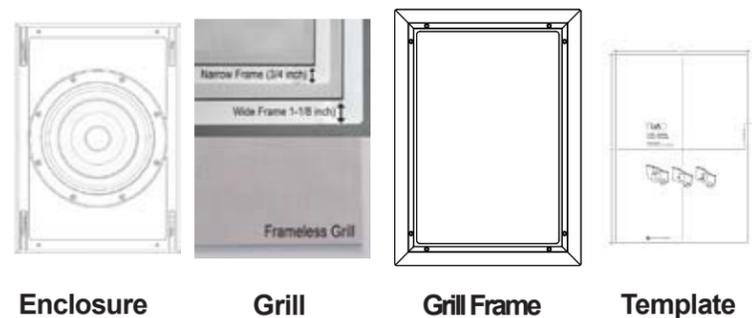


**Unpacking / Contents - 3 models**
**InRoom Bronze SlimSub**

**OnWall Bronze SlimSub**

**InWall Bronze/4 SlimSub**

**Bronze SlimSub Family**

Triad offers 3 versions of our critically acclaimed high-performance Slim Sub subwoofer to fit virtually any application, room & location. Driven by the RackAmp 350 DSP, each version delivers the same exceptional power and deep bass from its remarkably compact enclosure. You can match any decor with our Custom Color option or hide the sub from view completely. Taking up little to no floor space, it is easy to find space for the 4 corner-subwoofer configuration recommended by industry experts\* as the easiest and best way to get deep, powerful, and accurate bass over the largest listening area. With this setup SlimSubs can fill large rooms better than a single bigger subwoofer. To make multi-subs easier, SlimSubs can be ordered with two 8 ohm enclosures driven in parallel by a single amp, giving performance halfway between 1 sub/ 1 amp and 2 subs/ 2 amps.

\*CEA/CEDIA Bulletin CEB22: *Home Theater Recommended Practice: Audio Design.*

**Specifications**

Applicable Models	Dimensions Inches / cm	Woofers Size/Material	F3 (-3dB)	Max Output Midwall	Impedance Nominal	Weight lbs/kg	Amplifier
InRoom Bronze SlimSub Encl	14.0x19.5x4.3** / 35.6x49.5x10.9	10"/26cm aluminum	28 Hz	108dB	4 ohms	19.0/8.6	RackAmp 350 DSP
OnWall Bronze SlimSub Encl	14.0x19.5x4.3 / 35.6x49.5x10.9	10"/26cm aluminum	28 Hz	108dB	4 ohms	19.0/8.6	RackAmp 350 DSP
InWall Bronze/4 SlimSub Encl	13.5x19.0x3.9 / 34.3x48.3x9.9	10"/26cm aluminum	28 Hz	108dB	4 ohms	24.5/11.1	RackAmp 350 DSP


\*\*InRoom Bronze SlimSub is 15.0 inches (38.1cm) tall when upright on feet and requires 5.9 inches (15.0cm) depth for the standing feet. Enclosure is 4.0 inches (10.2cm) deep without grill.

**North American Limited Warranty**

Triad speakers are warranted to be free from defects in manufacturing and workmanship (10) years when operated under normal conditions. Should any such defects occur within the warranty period call Triad Service at 1-503-256-2600 for an RA (Return Authorization) number. Return the product in intact factory packaging with RA number clearly visible on outside of box and proof & date of purchase inside to:

Triad Speakers Inc., 15835 NE Cameron Blvd.,  
Portland, Oregon 97230 USA

Triad is not responsible for any shipping damage coming in to Triad. If you do not have intact factory packaging, contact your dealer or Triad Service for purchase. At our discretion we will repair or replace the product and return it free of charge. International customers should contact their dealer for service. This limited warranty is extended only to Triad products and is expressly in lieu of all other warranties expressed or implied.

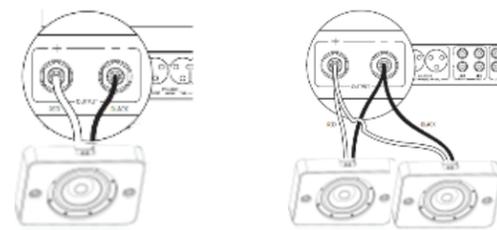**RackAmp Connections & Set Up**


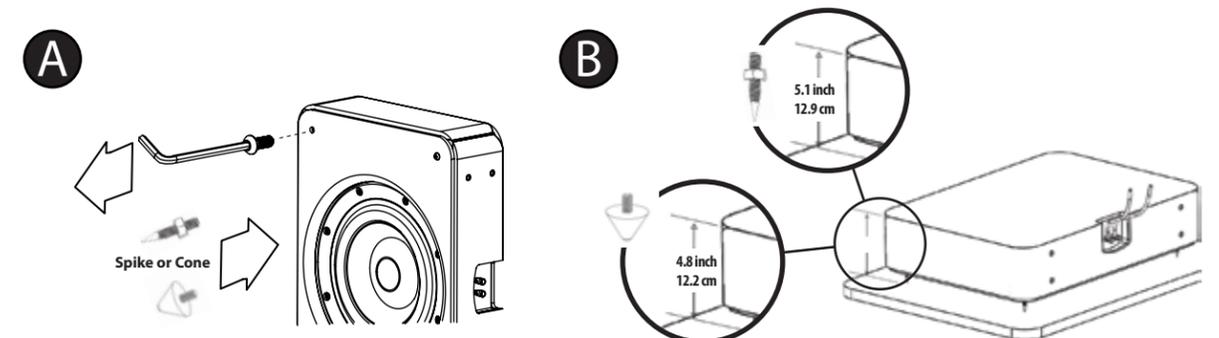
(1) 4 ohm sub

(2) 8 ohm subs  
wired in parallel

**RackAmp Settings:**

Pick Sub: *IW Bronze DSP*  
Boundary: *Midwall* within 2 feet of single boundary  
*InRoom* farther than 2 feet from boundary  
*Corner* within 2 feet of corner.


Note:  
Placing InRoom Bronze SlimSub face down under furniture (bed, couch, cabinet, etc.) requires a minimum height clearance of 5-1/8 inches plus 14-1/8 x 19-5/8 inches of clear space.

**InRoom Bronze SlimSub - Face Down (Flat) Installation**


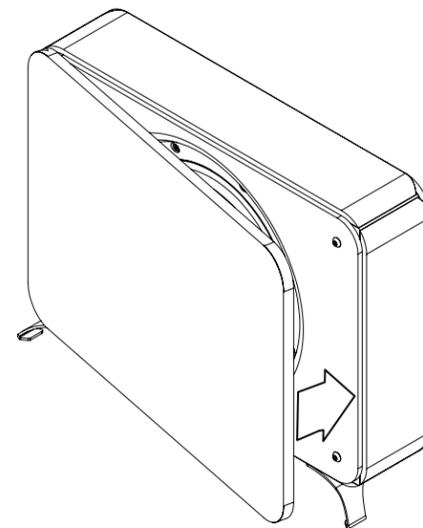
With grill off, remove all 4 button screws from enclosure face with Allen key; replace with included spikes or cone feet. Adjust so that all 4 feet make solid contact with floor or carpet without rocking or tipping. With spikes, remember to tighten the lock nuts.

Securely connect speaker wires (min 14 gauge AWG) through push-in binding posts. Be sure to preserve correct polarity with amp (red to red); Place sub in position face down, connect RackAmp and set up as shown.


### InRoom Bronze SlimSub - Upright Installation

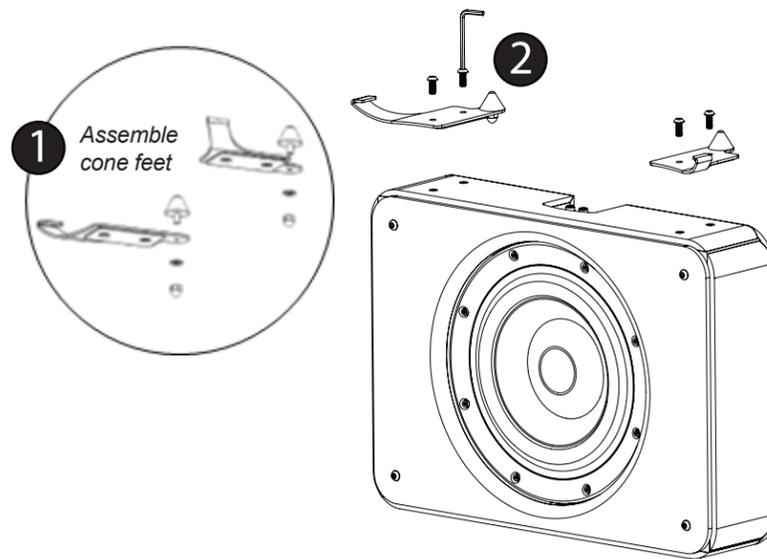


**A** 1: Attach cone feet to the standing feet with acorn nuts & washers (see insert). 2: With cone feet to the back of the enclosure, securely screw the 2 standing feet into the 4 inserts in the bottom of the enclosure with 4 button screws and 5/32" Allen key.



**B** Attach grill at one end; snap grill into place making sure that all 4 magnets are secure and that grill is snug all around.

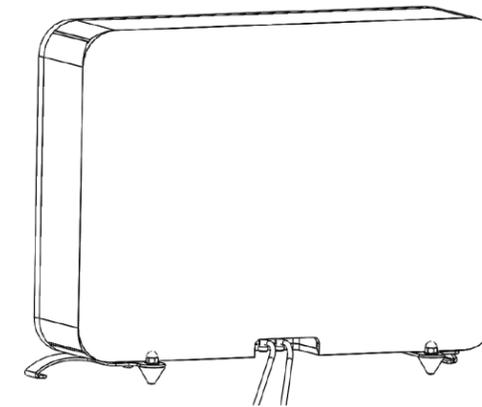


**C** Securely connect speaker wires (min 14 gauge AWG) through push-in binding posts. Be sure to preserve correct polarity with amp (red to red).

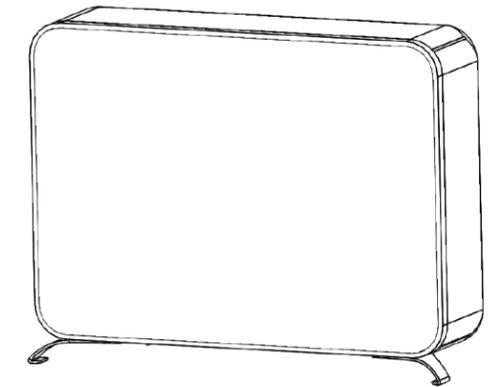


**D** Set subwoofer in place. Connect speaker wires to RackAmp and set up RackAmp with instructions on Page 1.

### OnWall Bronze SlimSub - Installation

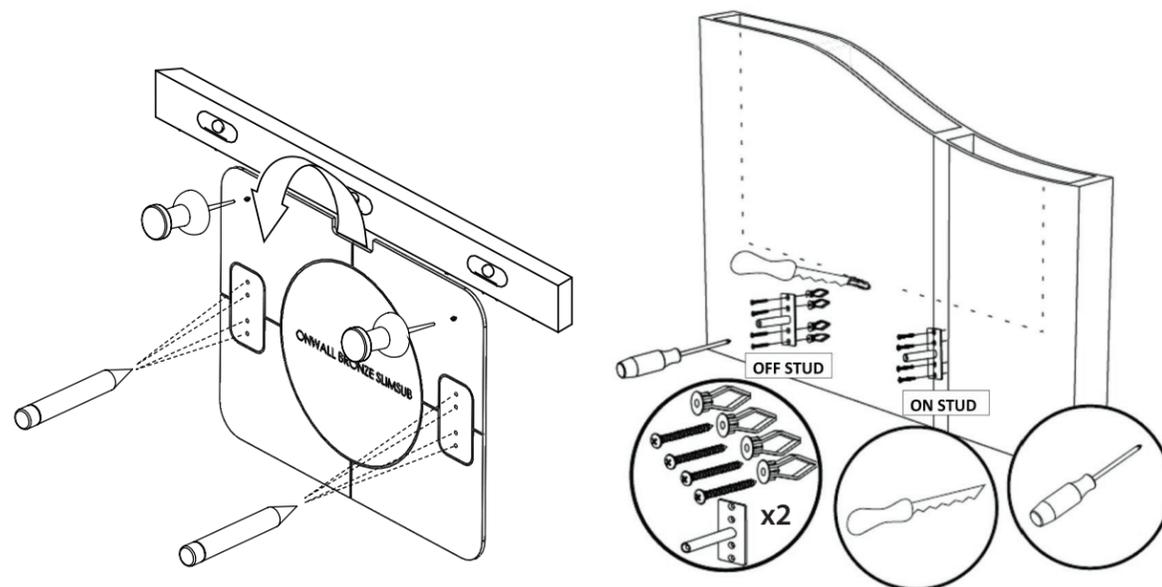


**A** Level & pin template to wall. Sub can be positioned horizontally (landscape) or vertically (portrait) with binding posts at either end. Outline wire hole and all 8 screw holes for 2 mounting posts. Screw post(s) into a stud if possible.

**B** Cut wire hole; install anchors if there are no studs. Always screw both mounting posts to wall with 4 screws per post. Test both posts for shear strength.

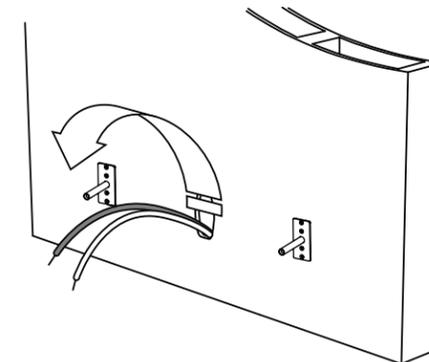

**C** Pull speaker wire through wire hole. Securely connect speaker wires (min 14 gauge AWG) through push-in binding posts. Be sure to preserve correct polarity with amp (red to red).

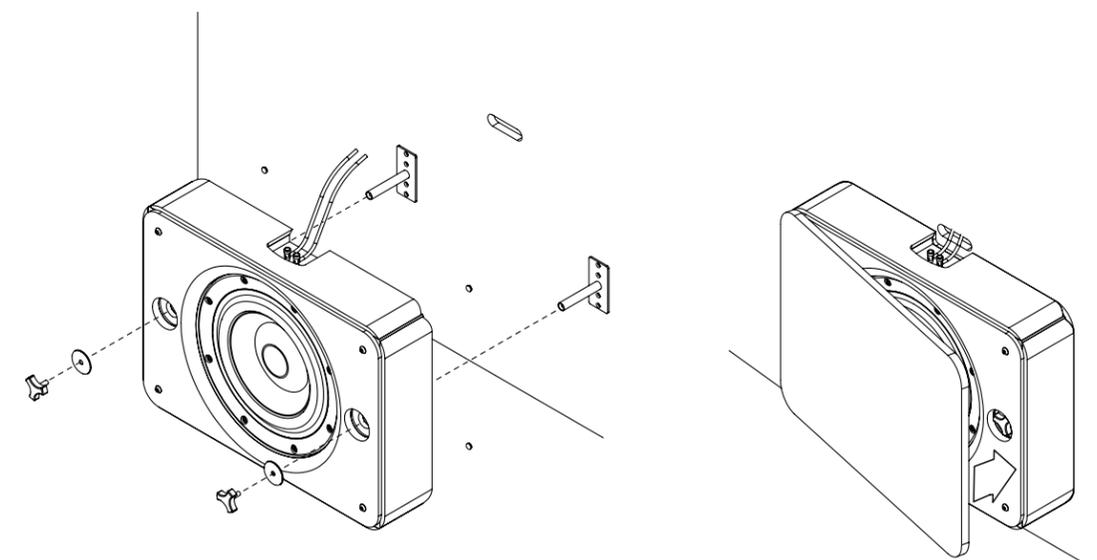

**D** Attach adhesive backed bumper to each of the 4 back corners. Mount speaker on posts; loosely tighten knobs through washers into posts. Level or align +/- 1/4" (6.35mm), then tighten both knobs.

**E** Attach grill at one end; snap grill into place making sure that all 4 magnets are secure. Snug all around. Connect speaker wires to RackAmp and set up RackAmp with instructions on Page 1.