




CHOOSE OPTIONS

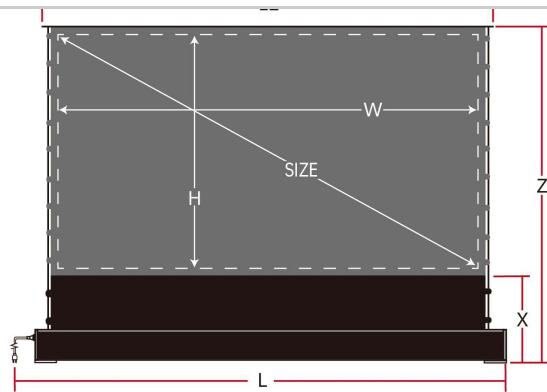


Main view after the screen is opened
(The actual standard view area is within the dotted line)



Right view after the screen is closed




Left view after the screen is closed

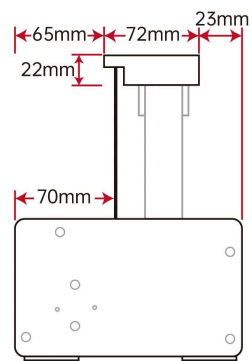

Right view after the screen is opened

S Pro PLUS Motorized Tension Floor Rising Screen SPEC - Ultra Short Throw Ambient Light Rejecting Screen Material -										
Aspect Ratio	Diag.Size	Standard View Area		Overall Case Length including space occupied by plug and wire	Upper cover size	Overall Height	Bottom Black Border With housing	Packing Dimension	G.W	N.W
	(inch)	W	H	L	L2	Z	X	mm	Kgs	Kgs
16:9	72"	1594	896	1831	1670	1211	270	1900×240×210	22.00	21.00
	84"	1860	1046	2077	1905	1436	350	2150×240×210	23.00	22.00
	92"	2037	1145	2257	2081	1535	350	2300×240×210	24.00	23.00
	100"	2214	1245	2431	2276	1635	350	2500×240×210	26.00	25.00
	110"	2435	1370	2687	2528	1760	350	2740×240×210	29.00	28.00
	120"	2656	1494	2910	2730	1884	350	2970×240×210	31.00	30.00
	130"	2878	1619	3105	2988	2090	500	3200×240×210	34.00	33.00

*S PRO PLUS/ S PRO P PLUS Common Version *Unit (mm), handmade, may have an error of 1-2cm

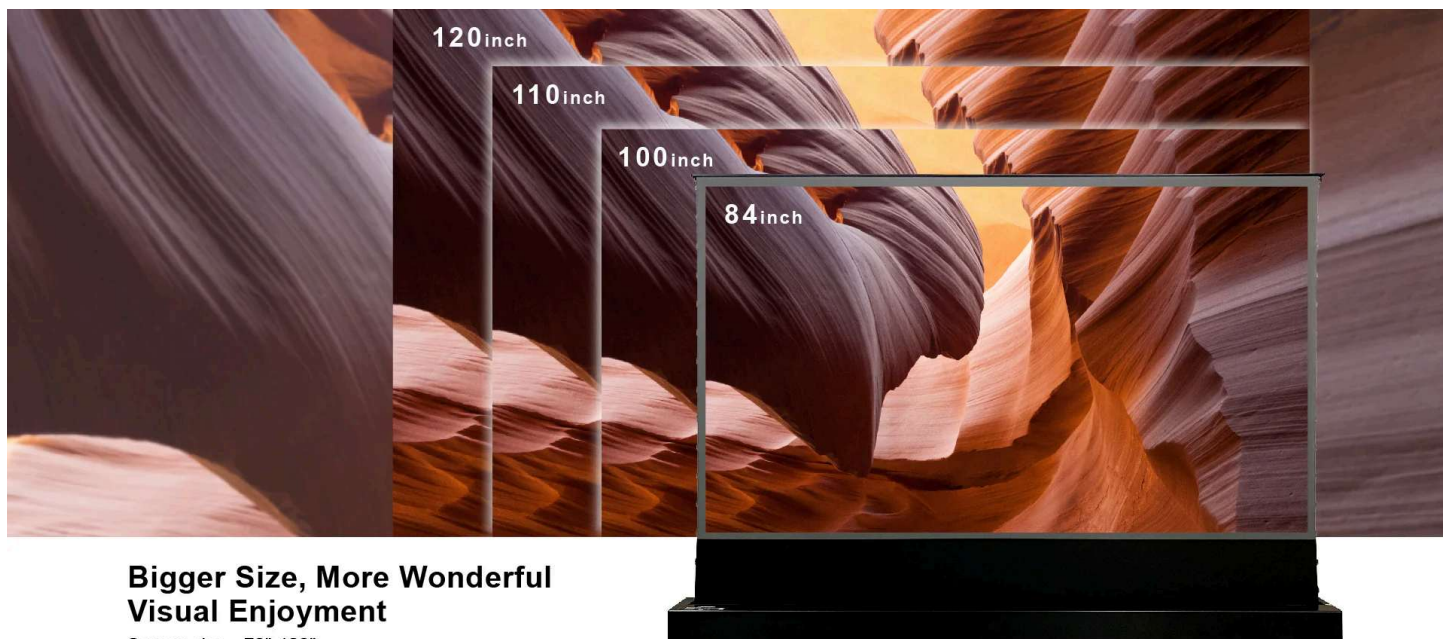

Related Products